

Avide LED T5 Integrated Tube AC Plug 1m

Product code:	ABT5-ACPLUG
Brand link:	avidelighting.com/qr/ABT5-ACPLUG
ID:	AB-190518
Company name:	Bramcke Hungary Kft.
Company address:	Kishatár utca 17., 4031 Debrecen

QR code:



Date of issue: 2024-05-21

Page: 1/3


SPECIFICATIONS

EAN code:	5999562280089
Warranty:	2year(s)
Working temperature:	-20 - + 40 °C
Packaging:	1/b
Certifications:	CE

TECHNICAL DETAILS

Wattage:	
Voltage:	220-240V
Beam angle:	
Dimmability:	No
Lumen output:	
Color temperature:	
Lifetime:	
Energy class:	
Type of LED:	SMD
IP standard:	IP20

PRODUCT PICTURE

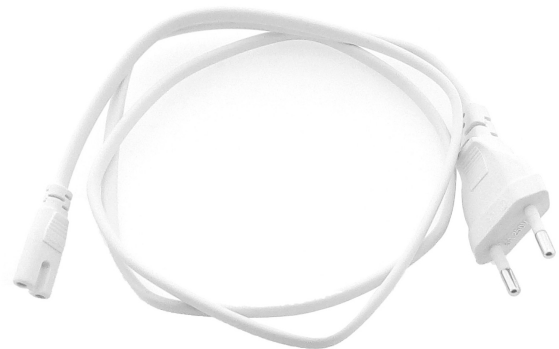

Avide LED T5 Integrated Tube AC Plug 1m

Product code:	ABT5-ACPLUG
Brand link:	avidelighting.com/qr/ABT5-ACPLUG
ID:	AB-190518
Company name:	Bramcke Hungary Kft.
Company address:	Kishatár utca 17., 4031 Debrecen

QR code:



Date of issue: 2024-05-21

Page: 2/3

PRODUCT SIZE

Diameter:

Length:

CARDBOARD BOX

EAN:	5999562280089
Packaging:	1/b
Dimensions:	80mm x 195mm x 20mm
Net weight:	37g
Gross weight:	48g


CARTON

EAN:	5999562280096
Packaging:	1/b
Dimensions:	380mm x 560mm x 220mm
Net weight:	0.037kg
Gross weight:	0.048kg

PALLET EXAMPLE

Height:	
Width:	120cm (std Euro pallet)
Depth:	80cm (std Euro pallet)
Cartons per pallet:	1carton/pallet
Cartons per row:	
Net weight:	0.037kg
Gross weight:	0.048kg

PRODUCT PICTURE



PRODUCT OUTLINE

Avide LED T5 Integrated Tube AC Plug 1m

Product code:	ABT5-ACPLUG
Brand link:	avidelighting.com/qr/ABT5-ACPLUG
ID:	AB-190518
Company name:	Bramcke Hungary Kft.
Company address:	Kishatár utca 17., 4031 Debrecen

QR code:



Date of issue: 2024-05-21

Page: 3/3

PRODUCT DESCRIPTION

The Avide LED integrated dust- and moisture-proof fixtures represent the modern versions of traditional fittings. The fixtures of different lengths replacing the tube fixtures have a built-in LED panel that guarantees energy-saving operation. In terms of the material used, the products have a break-resistant cover. Due to the IP65 protection of the fixture, it is protected from dust and moisture, thus can also be operated at places with higher exposure to dust and humidity.

The product range includes 3 different lengths and brightness levels, available in neutral white color temperature and with an opaline cover. The 60cm fixture has 20W power, while the 120 centimeter version has a 40W and the 150 centimeter type a 60W power output respectively.